



VISTA 3D / 3D VIEW

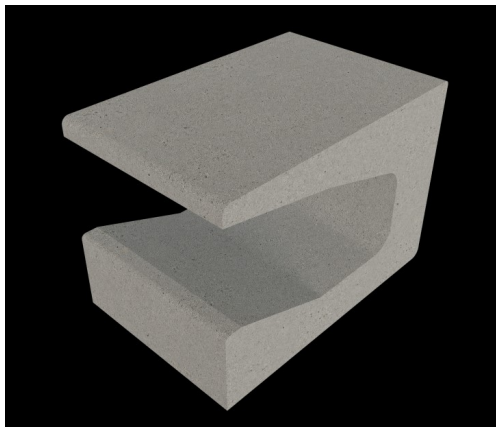


Test standard	Dimensions (mm)	Declared value
EN 771-3	Length	496 (+3, -5)
	Width	195 (+3, -5)
	Height	187 (+3, -5)
	Minimum wall thickness	25
Test standard	Mechanical and physical properties	Declared value
EN 771-3	Compressive stress (N/mm ²) perpendicular to surface	5
	Water absorption by capillarity (g/m ² s)	2
	Reaction to fire (Euro class)	A1
	Bulk density/Absolute density (Kg/m ³)	800 / 2070
	Thermal conductivity (W/mK)	1.30
	Shear stress (N/mm ²) lightweight mortars	0.15
	Shear stress (N/mm ²) joint and thin layer mortars	0.30
Packaging		
Weight per unit (Kg)	15	Weight per pallet (Kg) 920
Units per pallet	60	Units per linear meter 5
Package	Pallet (1115x1065 mm) with 3 straps.	

SECCIÓN / SECTION A-A'

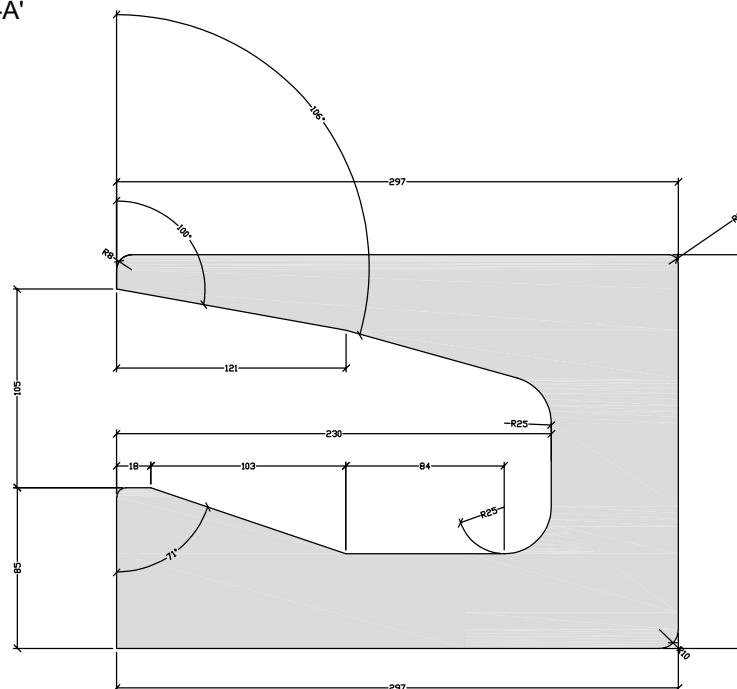

VISTA DE PLANTA / PLANT VIEW

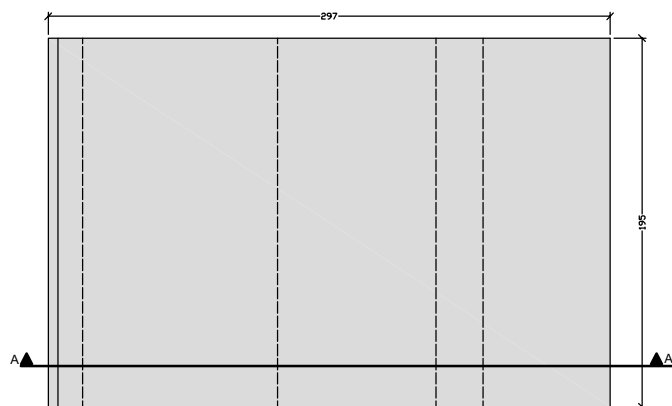

Referencia: RS951
Reference:

Plano: Ficha Técnica Producto
Layout: Technical Data Sheet

Archivo / File:

RefRS951 (15_02_21).dwg

Formato - Escala
Size - Scale :

A4 - 1/4

Fecha / Date:

15/02/2021