



VISTA 3D / 3D VIEW

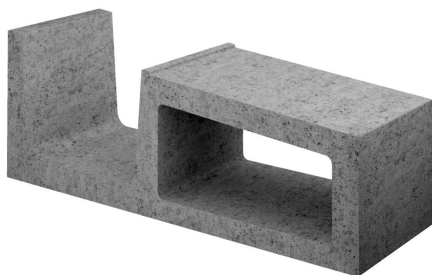


Colores Disponibles / Available Colours:
Comprobar Tarifa / Check Price List

Test standard	Dimensions (mm)	Declared value	
EN 771-3	Length	496 (+3, -5)	
	Width	195 (+3, -5)	
	Height	187 (+3, -5)	
	Minimum wall thickness	25	
Test standard	Mechanical and physical properties	Declared value	
EN 771-3	Compressive stress (N/mm²) perpendicular to surface	5	
	Water absorption by capillarity (g/m².s)	2	
	Reaction to fire (Euro class)	A1	
	Bulk density/Absolute density (Kg/m³)	800 / 2070	
	Thermal conductivity (W/mK)	1.30	
	Shear stress (N/mm²) lightweight mortars	0.15	
	Shear stress (N/mm²) joint and thin layer mortars	0.30	
	Packaging		
Weight per unit (Kg)	15	Weight per pallet (Kg)	920
Units per pallet	60	Units per linear meter	5
Package	Pallet (1115x1065 mm) with 3 straps.		

SECCIÓN / SECTION A-A'

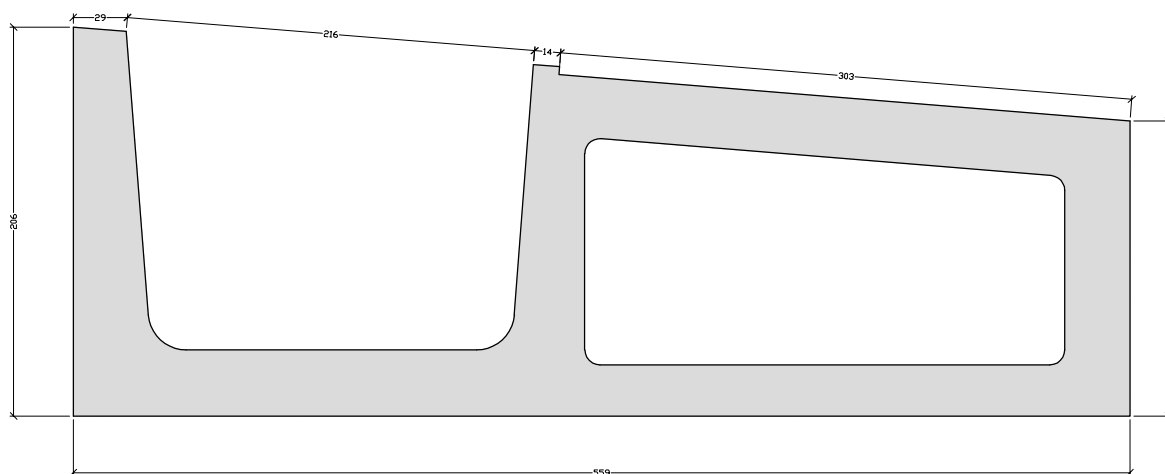

VISTA DE PLANTA / PLANT VIEW

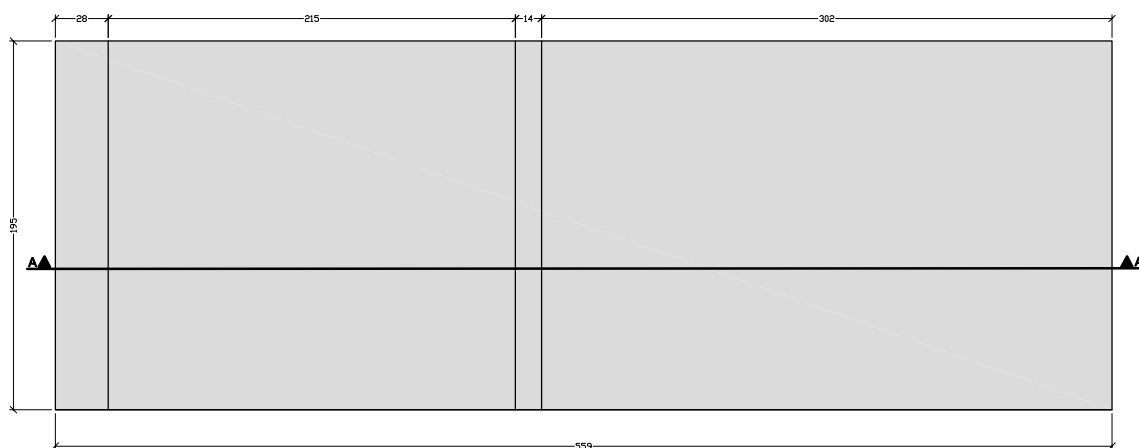

Referencia:
Reference: RS921

Plano:
Layout: Ficha Técnica Producto
Technical Data Sheet

Archivo / File:

RefRS921 (15_02_21).dwg

Formato - Escala
Size - Scale :

A4 - 1/4

Fecha / Date:

15/02/2021